
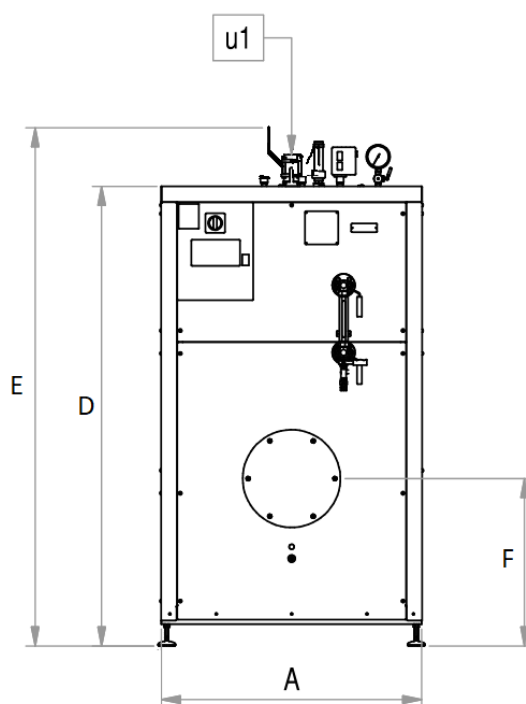
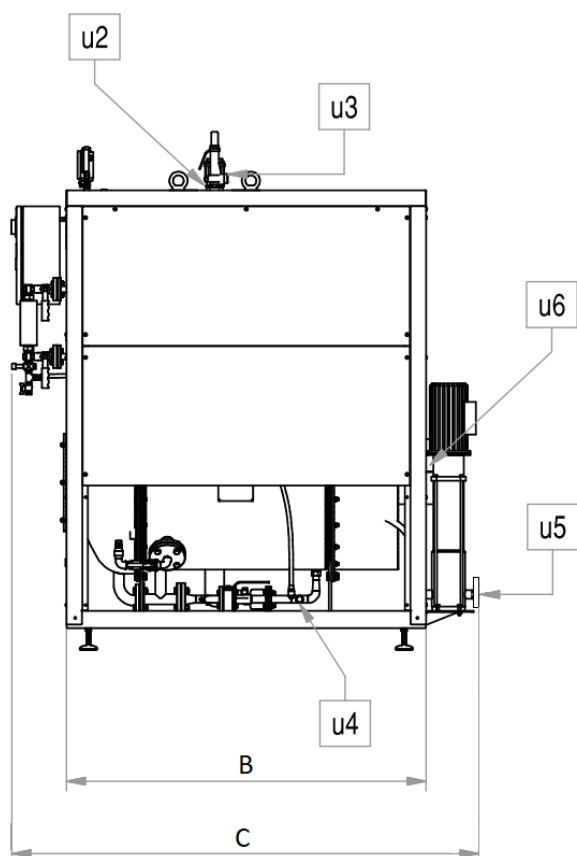


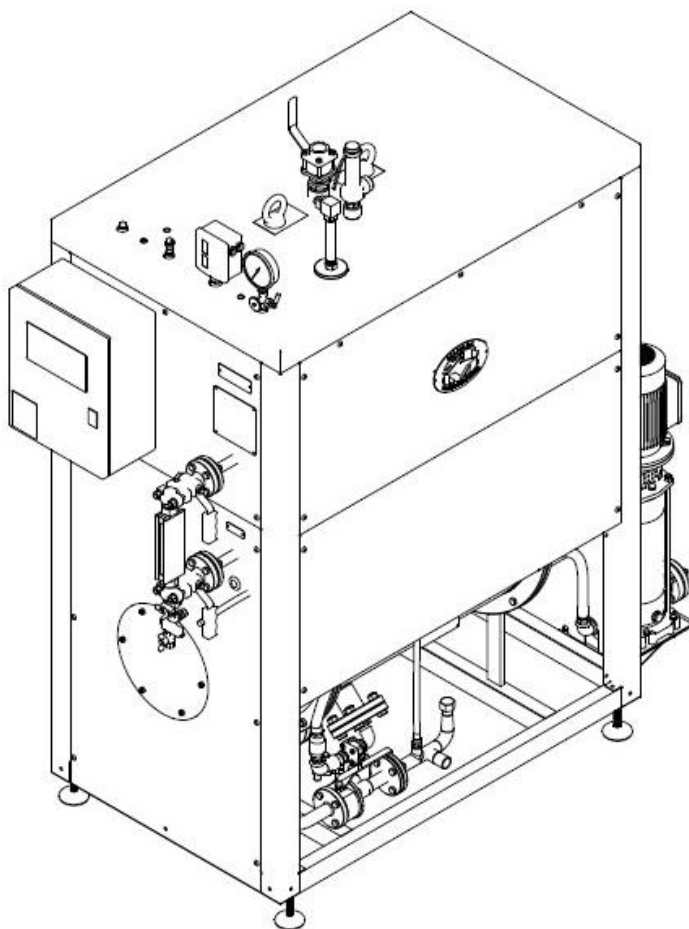

Modello / Model			TFI 15	TFI 20	TFI 30	TFI 40	TFI 50	TFI 60	TFI 70	TFI 80	TFI 100	TFI 120	TFI 130	TFI 150
Produzione Vapore <i>Steam Production</i>		<i>kg/h</i>	150	200	300	400	500	600	700	800	1000	1200	1300	1500
Potenzialità Resa <i>Heat Output Delivered</i>		<i>kcal/h</i>	90.000	120.000	180.000	240.000	300.000	360.000	420.000	480.000	600.000	720.000	780.000	900.000
		<i>kW</i>	104,8	139,7	209,2	279,4	349,2	419	489	559	698	838	908	1047
Potenza al Focolare <i>Furnace Capacity</i>		<i>kcal/h</i>	98.355	133.145	199.717	266.290	332.862	399.435	466.007	527.426	660.571	792.857	857.282	988.000
		<i>kW</i>	114,5	155	232,5	310	387,5	465	542,5	614	769	923	998	1151
Pressione <i>Pressure</i>		<i>Bar</i>	5 11,77	5 11,77	5 11,77	5 11,77	5 11,77	5 11,77	5 11,77	5 11,77	5 11,77	5 11,77	5 11,77	5 11,77
Peso <i>Weight</i>		<i>kg</i>	550	650	885	900	1100	1255	1255	1700	2700	2700	2700	2750
Pot. elettrica + bruciatore <i>Electrical power + burner</i>		<i>kW</i>	3,6	3,8	3,8	3,8	4,8	4,8	5,4	5,8	6,5	6,5	6,5	7,2
Alimentazione <i>Power supply</i>		<i>Volt</i>	400 + N	400 + N	400 + N	400 + N	400 + N	400 + N	400 + N	400 + N	400 + N	400	400	400
Rendimento <i>Efficiency</i>		<i>%</i>	90	90	90	90	90	90	90	90	90	90	90	90
Contropressione in cc <i>Combustione chambre pression</i>		<i>mbar</i>	2,5	3	4	4,5	5	5,5	6	6	6	7	7	7
Attacchi / Fittings			TFI 15	TFI 20	TFI 30	TFI 40	TFI 50	TFI 60	TFI 70	TFI 80	TFI 100	TFI 120	TFI 130	TFI 150
Vapore <i>Steam</i>	<i>u1</i>	<i>mm</i>	3/4"	3/4"	1 1/4"	1 1/4"	2"	2"	2"	2"	DN50	DN65	DN65	DN65
Ingresso valvola di sicurezza <i>Safety valve inlet</i>	<i>u2</i>	<i>mm</i>	3/4"	3/4"	3/4"	1"	1"	1"	1"	1"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Uscita valvola di sicurezza <i>Safety valve outlet</i>	<i>u3</i>	<i>mm</i>	1"	1"	1"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"	2"	2"	2"	2"
Scarico <i>Discharge</i>	<i>u4</i>	<i>mm</i>	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"
Ingresso acqua <i>Water inlet</i>	<i>u5</i>	<i>mm</i>	3/4"	3/4"	DN 25	DN 25	DN 25	DN 25	DN 25	DN 25	DN 25	DN 25	DN 25	DN 25
Camino <i>Chimney</i>	<i>u6</i>	<i>mm</i>	160	160	160	200	250	300	300	300	350	350	350	350
Dimensioni / Dimensions			TFI 15	TFI 20	TFI 30	TFI 40	TFI 50	TFI 60	TFI 70	TFI 80	TFI 100	TFI 120	TFI 130	TFI 150
Larghezza <i>Width</i>	<i>A</i>	<i>mm</i>	740	740	895	895	1135	1135	1135	1235	1370	1370	1370	1370
Profondità <i>Depth</i>	<i>B</i>	<i>mm</i>	1105	1105	1355	1355	1625	1625	1625	1790	2405	2405	2405	2405
Profondità con accessori <i>Depth with accessories</i>	<i>C</i>	<i>mm</i>	1476	1476	2003	2000	2231	2260	2259	2494	3015	3015	3381	3368
Altezza <i>Height</i>	<i>D</i>	<i>mm</i>	1700	1700	1900	1900	2020	2020	2020	2115	2310	2310	2310	2310
Altezza con accessori <i>Height with accessories</i>	<i>E</i>	<i>mm</i>	1920	1920	2175	2175	2300	2300	2300	2400	2705	2705	2705	2705
Altezza flangia bruciatore e camino <i>Height of burner flange and chimney</i>	<i>F</i>	<i>mm</i>	600	600	680	680	745	745	745	820	925	925	925	925