
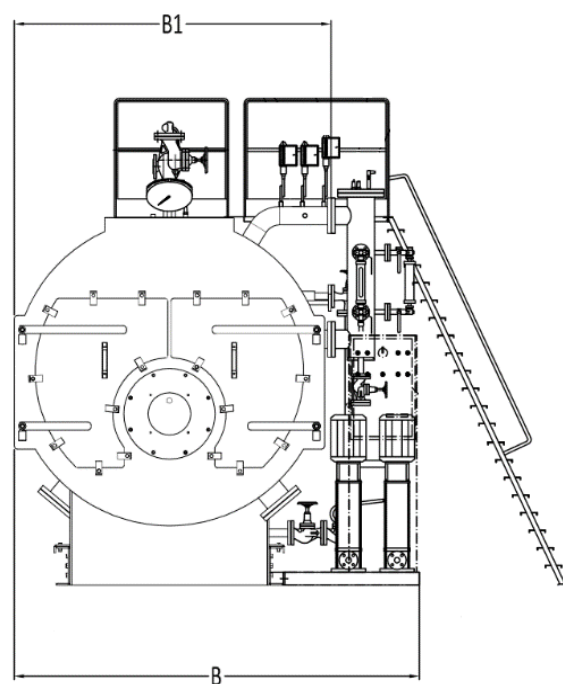
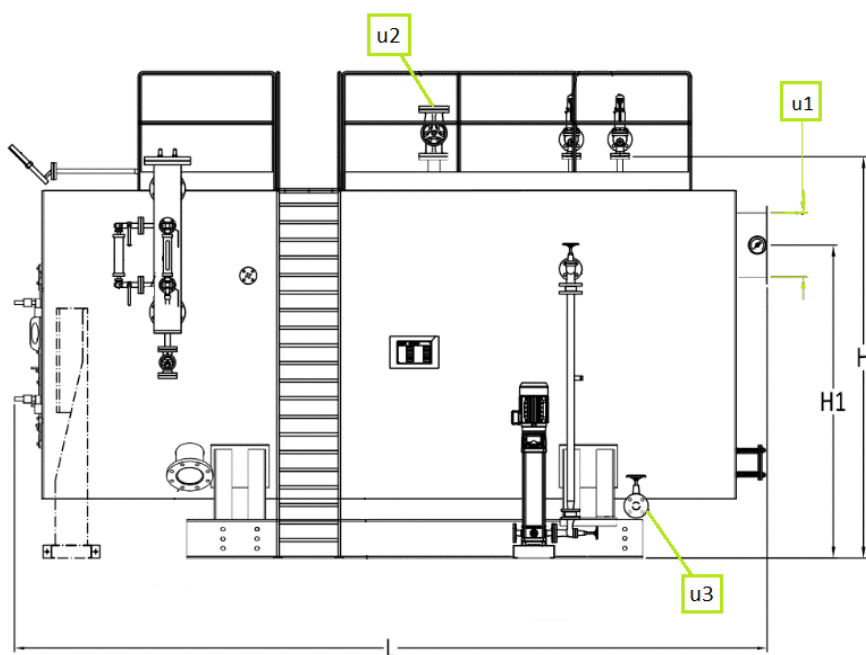


WB 20÷100

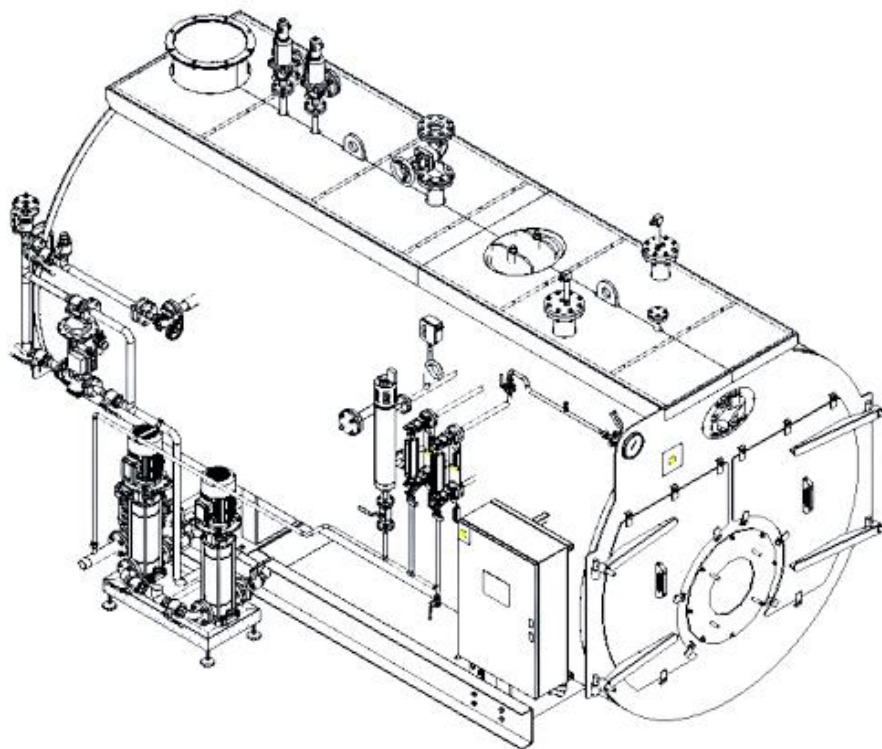

Modello / Model			WB 20	WB30	WB 40	WB50	WB60	WB70	WB 80	WB 100
Produzione Vapore <i>Steam Production</i>	kg/h		2000	3000	4000	5000	6000	7000	8000	10.000
Potenzialità Resa <i>Heat Output Delivered</i>	kW		1385	2077	2769	3462	4154	4846	5539	6923
Potenza al Focolare <i>Furnace Capacity</i>	kW		1538	2307	3077	3846	4615	5384	6154	7692
Pressione Camera Combustione <i>Combustion chambre press.</i>	mBar		3,5	3,5	6	7,5	8	8,5	10	7,5
Contenuto Acqua Totale a livello <i>Water Content full</i>	lt		5720	8500	10.300	11300	12000	13720	14950	19520
Peso <i>Weight</i>	kg		8400	11200	12500	14400	16700	18300	18500	23600
Dimensioni/ <i>Dimensions</i>			WB 20	WB30	WB 40	WB50	WB60	WB70	WB 80	WB 100
Larghezza con accessori <i>Width with accessories</i>	B	mm	2520	2780	2940	2980	3080	3160	3300	3450
Larghezza <i>Width</i>	B1	mm	1920	2230	2380	2380	2480	2560	2610	2800
Profondità <i>Depth</i>	L	mm	4370	4900	4950	5610	5620	5770	6650	6880
Altezza flangia camino <i>Height of chimney</i>	H	mm	2450	2690	2900	2900	2990	3070	3120	3320
Altezza con accessori <i>Height with accessories</i>	H1	mm	1900	2200	2350	2350	2420	2470	2530	2680
Attacchi/ <i>Fittings</i>			WB 20	WB30	WB 40	WB50	WB60	WB70	WB 80	WB 100
Camino <i>Chimney</i>	u1	Ø	400	400	450	550	550	650	650	700
Vapore <i>Steam</i>	u2	DN	65	80	100	125	125	125	125	150
Scarico <i>Discharge</i>	u3	DN	40	40	40	40	40	40	40	40